



AEF - DirectConnectLED

LED High Bay

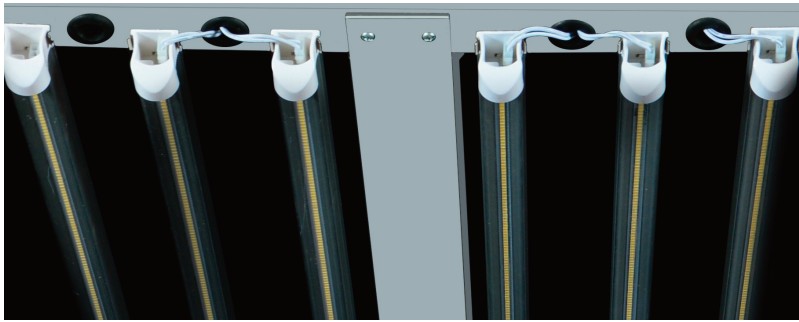

FEATURES

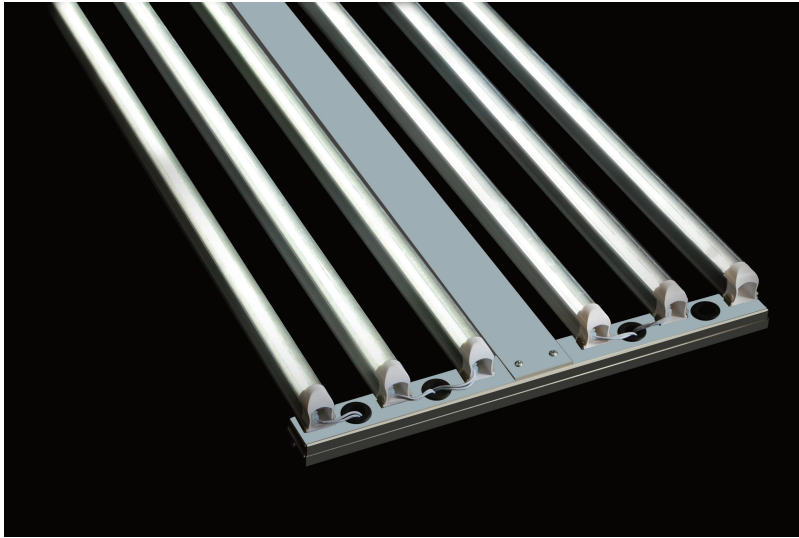

- Highest lm/w packages in the industry
- Light angle up to 160°
- 5 year non-prorated warranty
- No external LED drivers
- Industry leading modularity
- DirectConnectLED allows for future upgrade to higher lm/w packages and ease of future maintenance
- Ability to daisy chain fixtures off of one power source
- LED chip placement designed for low-to-no glare
- Heat disipation not dependent on fixture design, allowing for installation in high heat, dusty and smokey environments
- Includes adjustable toggled suspension kit (additional pendant mount and motion sensor options available)

Technical Specifications

Housing	Aluminum Extrusion & Poly Carbonate Diffuser - Alum. Frame	Rated Life	> 50,000 hours
Work Environment	Indoor use (applicable for dry environments) IP20	Operating Temperature	-20 - 60°C (-4 - 140°F)
Color Temperature	4000K or 5000K	CRI	83
Lumen Maintenance 55°C at 9000h	98.89%	Input Voltage/Current	100-300VAC
THD	< 10%	Power Factor	> 0.98

Model	Dimension	Weight	InputPower	Delivered Lumens
LM-HB4LAMP96W	20" x 45.812" x 3.187"	6 lbs.	96W	15,168 lm
LM-HB6LAMP144W	20" x 45.812" x 3.187"	6 lbs.	144W	22,752 lm
LM-HB8LAMP192W*	30" x 45.812" x 3.187"	7 lbs.	192W	30,336 lm
LM-HB10LAMP240W*	40" x 45.812" x 3.187"	8 lbs.	240W	37,920 lm
LM-HB12LAMP288W*	40" x 45.812" x 3.187"	8 lbs.	288W	45,504 lm

* Sold in large quantities only.

Distributor for Always Earth Friendly: